

LED RF Controller Mono

FUNKTIONEN

1. Ein- und Ausschalten von bis zu 10 verschiedenen Zonen, abhängig von der Fernbedienung (1 Zone, 5 Zonen, 10 Zonen)
2. Dimmen von bis zu 10 verschiedenen Zonen, abhängig von der Fernbedienung (1 Zone, 5 Zonen, 10 Zonen)
3. Mit einer Fernbedienung können mehrere Empfänger synchron angesteuert werden.
4. Es können bis zu 10 Zonen einer Zone untergeordnet werden.
5. Ein Empfänger entspricht einer Zone - alle 4 Ausgangskanäle machen das selbe, ausser bei der 4 Kanal Fernbedienung.
6. Es können mehrere Empfänger einer Zone zugeordnet werden.
7. Zusätzliche Ansteuerung mittels handelsüblichen Tasters möglich.

FEATURES

1. Power on and power off upto 10 different zones, depending on the remote control (1 zone, 5 zones, 10 zones)
2. Dimming upto 10 different zones, depending on the remote control (1 zone, 5 zones, 10 zones)
3. One remote can control several receivers synchronous.
4. Upto 10 zones can be slaved to one zone.
5. One receiver conforms one zone - all 4 output channels make the same, except in the case of the 4 channel remote.
6. Several receivers can be set to one zone.
7. Additional control by using a commercial available switch.



LC-002-010
LED RF Controller Mono - Empfänger
LED RF Controller Mono - receiver



LC-002-011
LED RF Controller Mono - 5 Zonen Fernbedienung
LED RF Controller Mono - 5 zones remote



LC-002-021
LED RF Controller Mono - 10 Zonen Fernbedienung
LED RF Controller Mono - 10 zones remote



LC-002-016
LED RF Controller Mono - 1 Zonen Funktaster
LED RF Controller Mono - 1 zone radio push button



LC-002-012
LED RF Controller Mono - Wand Sender schwarz
LED RF Controller Mono - wall remote black



LC-002-022
LED RF Controller Mono - Single Fernbedienung
LED RF Controller Mono - single remote



LC-002-014
LED RF Controller Mono - 4 Kanal Fernbedienung
LED RF Controller Mono - 4 channel remote



LC-002-015
LED RF Controller Mono - Doppeltastermodul
LED RF Controller Mono - Double push button module



LC-002-017
LED RF Controller Mono - 2 Zonen Funktaster
LED RF Controller Mono - 2 zone radio push button




LC-002-013
LED RF Controller Mono - Wand Sender weiss
LED RF Controller Mono - wall remote white

PRODUKTSPEZIFIKATIONEN


MAX. ANSCHLUSSLEISTUNG	4x5A (240W 12V) oder (480W 24V)
PWM FREQUENZ	1500Hz
MAX. LEITUNGSQUERSCHNITT	1,5mm ²
ZUSTAND NACH NETZRÜCKKEHR	Zuletzt eingestellter Wert
ABMESSUNGEN (L X B X H)	178 x 46 x 19mm
GEWICHT	100g

PRODUCT SPECIFICATIONS

MAX. OUTPUT POWER	4x5A (240W 12V) or (480W 24V)
PWM FREQUENCY	1500Hz
MAX. WIRE CROSS-SECTION	1,5mm ²
STATUS AFTER MAINS RETURN	Last selected value
DIMENSIONS (L X W X H)	178 x 46 x 19mm
WEIGHT	100g



ANSCHLUSSSCHEMA WIRING DIAGRAM

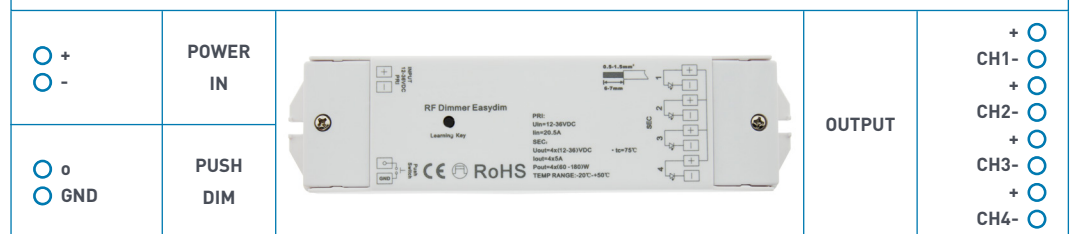

HINWEIS PLEASE NOTE

Bei der Montage der Steuerungen sind die Montagerichtlinien, die im Katalog unter dem Kapitel „Wissenswertes“ angeführt sind einzuhalten! Wichtige Punkte sind unter anderem, dass die Steuerung niemals zur Gänze ausgelastet wird, sondern mit ca. 25% Leistungsreserve betrieben werden muss. Pro Steuerung darf nur ein Netzteil angeschlossen werden und niemals mehrere parallel. Berücksichtigen Sie die Spannungsabfälle auf der Primär- und Sekundärseite der Steuerung und setzen Sie sie niemals einer direkten Sonneneinstrahlung aus. Montieren Sie die Steuerung so, dass sie von benachbarten Quellen nicht erhitzt wird und dass ihre eigenen erzeugte Wärme gut ableiten kann.

During assembly of the controllers the installation guidelines (see chapter "interesting facts") must be followed. Important aspects to consider are, among others, that the controller must never operate at full capacity but leave a margin of 25%. No more than one power supply unit should be attached to each controller and never multiple controllers in parallel. Consider voltage drops on the primary and secondary sides of the controller and never place it in direct sunlight. Assemble the controller in a way that it cannot be warmed by neighbouring sources and that heat can be conducted away efficiently.

