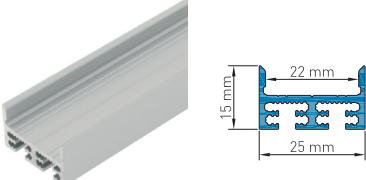
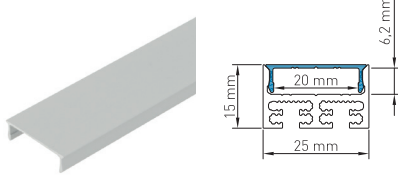
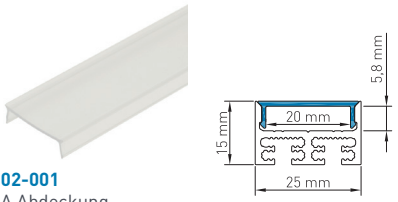
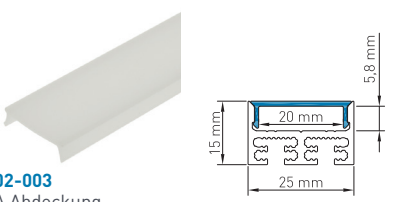
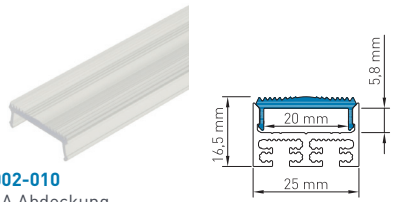
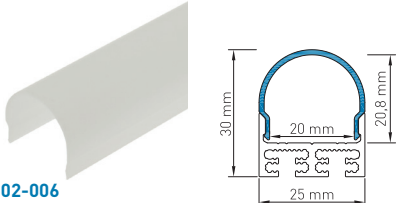
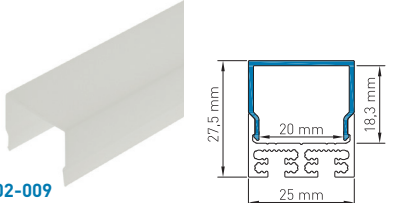
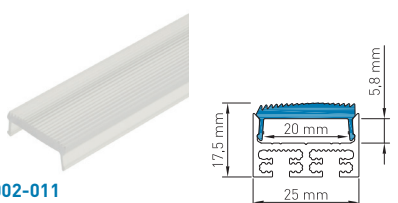


LED Profil TBK | max. LED Leistung pro Meter: 38W → Flexstrip 160

ALUMINIUM PROFILE & ABDECKUNGEN ALUMINIUM PROFILES & COVERS	
 <p>AP-002-010 Aluminium Profil TBK Aluminium profile TBK</p>	 <p>AB-002-100 Aluminium Abdeckung TB Aluminium cover TB</p>

PROFIL ABDECKUNGEN UND EINSCHÜBE PROFILE COVERS AND INSETS		
 <p>AB-002-001 PMMA Abdeckung TB Flach Transparent PMMA cover TB flat transparent</p>	 <p>AB-002-003 PMMA Abdeckung TB Flach Opal PMMA cover TB flat milky</p>	 <p>AB-002-010 PMMA Abdeckung TB engstrahlend - Abstrahlwinkel 36° PMMA cover TB narrow beam - beam angle 36°</p>
 <p>AB-002-006 PMMA Abdeckung TB Rund opal PMMA cover TB round milky</p>	 <p>AB-002-009 PMMA Abdeckung TB Eckig Opal PMMA cover TB square milky</p>	 <p>AB-002-011 PMMA Abdeckung TB asymmetrisch - Abstrahlwinkel 55° PMMA cover TB asymmetrical - beam angle 55°</p>

PROFIL ENDKAPPEN PROFILE ENDCAPS		
<p>Endkappenstärke End cap thickness 2,5mm</p>  <p>EK-002-000 Profil Endkappe TBK Flach geschlossen Profile endcap TBK flat closed</p>	<p>Endkappenstärke End cap thickness 2,5mm</p>  <p>EK-002-010 Profil Endkappe TBK Rund geschlossen Profile endcap TBK round closed</p>	<p>Endkappenstärke End cap thickness 2,5mm</p>  <p>EK-002-020 Profil Endkappe TBK Eckig geschlossen Profile endcap TBK square closed</p>
<p>Endkappenstärke End cap thickness 2,5mm</p>  <p>EK-002-001 Profil Endkappe TBK Flach mit Langloch Profile endcap TBK flat with cable entry</p>	<p>Endkappenstärke End cap thickness 2,5mm</p>  <p>EK-002-011 Profil Endkappe TBK Rund mit Langloch Profile endcap TBK round with cable entry</p>	<p>Endkappenstärke End cap thickness 2,5mm</p>  <p>EK-002-021 Profil Endkappe TBK Eckig mit Langloch Profile endcap TBK square with cable entry</p>

1m	2m	4m	SONDER LÄNGE	SPECIAL LENGTH
----	----	----	--------------	----------------

STANDARDLÄNGE = 2M | ALLE ANDEREN LÄNGEN SIND VOM UMTAUSCH UND DER RÜCKGABE AUSGESCHLOSSEN. LÄNGEN ÜBER 2M WERDEN MITTELS SPEDITION VERSENDET UND ERFORDERN EINE MINDESTBESTELLMENGE VON 10 STK.

STANDARD LENGTH = 2M | ALL OTHER LENGTHS ARE EXCLUDED FROM EXCHANGE AND RETURN. LENGTHS OVER 2M ARE SHIPPED BY FREIGHT CARRIER AND REQUIRE A MINIMUM ORDER QUANTITY OF 10 PCS.






HINWEIS PLEASE NOTE

Kunststoff und Aluminium besitzen unterschiedliche Ausdehnungskoeffizienten, welche bei der Montage zu berücksichtigen sind. Ausgehend von 20°C verändert sich die Länge beim Aluminium um ca. 0,25mm pro Meter und beim Kunststoff um ca. 0,70mm pro Meter je 10°C Temperaturunterschied.






Plastic and aluminium have different expansion coefficients, which must be considered during assembly. Based on 20°C the length of aluminium changes approximately 0,25mm per meter and plastic approximately 0,70 mm per meter per 10°C of difference in temperature.

PROFIL ZUBEHÖR PROFILE ACCESSORIES				
 <p>PZ-001-002 Seilabhänger 2m inkl. Deckenbefestigung Wire suspension 2m incl. ceiling fixture</p>	 <p>PZ-001-005 Seilabhänger 5m inkl. Deckenbefestigung Wire suspension 5m incl. ceiling fixture</p>	 <p>PZ-002-001 Seilstopper inkl. M4 Senkkopfschraube Wire stopper incl. M4 countersunk screw</p>	 <p>PZ-005-005 Montage Clip TBK Mounting Clip TBK</p>	
 <p>PZ-007-001 Montagewinkel schwenkbar Mounting angle swivelling</p>		 <p>EK-100-002 Torx Bit TX8 für Endkappenschrauben Torx Bit TX8 for endcap screws</p>	 <p>PZ-006-001 Saugnapf 30mm Suction cup 30mm</p>	






TBK PROFIL BESTÜCKT MIT FLEXSTRIP 36 RGB MIT EINEM LED ABSTAND VON 33MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN
TBK PROFILE FITTED WITH FLEXSTRIP 36 RGB WITH A LED DISTANCE OF 33MM IN COMBINATION WITH THE DIFFERENT COVERS

<p>PMMA Abdeckung TB Flach Transparent 91% Transmission</p>	<p>PMMA Abdeckung TB Engstrahlend 91% Transmission</p>	<p>PMMA Abdeckung TB Flach Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Rund Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Eckig Opal 57% Transmission</p>
				
<p>PMMA cover TB flat transparent 91% transmission</p>	<p>PMMA cover TB narrow beam 91% transmission</p>	<p>PMMA cover TB flat milky 50% transmission</p>	<p>PMMA cover TB round milky 50% transmission</p>	<p>PMMA cover TB square milky 57% transmission</p>






TBK PROFIL BESTÜCKT MIT FLEXSTRIP 24 ODER 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN
TBK PROFILE FITTED WITH FLEXSTRIP 24 OR 72 WITH A LED DISTANCE OF 16.5MM IN COMBINATION WITH THE DIFFERENT COVERS

<p>PMMA Abdeckung TB Flach Transparent 91% Transmission</p>	<p>PMMA Abdeckung TB Engstrahlend 91% Transmission</p>	<p>PMMA Abdeckung TB Flach Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Rund Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Eckig Opal 57% Transmission</p>
				
<p>PMMA cover TB flat transparent 91% transmission</p>	<p>PMMA cover TB narrow beam 91% transmission</p>	<p>PMMA cover TB flat milky 50% transmission</p>	<p>PMMA cover TB round milky 50% transmission</p>	<p>PMMA cover TB square milky 57% transmission</p>

TBKPROFIL BESTÜCKT MIT FLEXSTRIP 48 ODER 72 DW MIT EINEM LED ABSTAND VON 8,25MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN
TBK PROFILE FITTED WITH FLEXSTRIP 48 OR 72 DW WITH A LED DISTANCE OF 8.25MM IN COMBINATION WITH THE DIFFERENT COVERS

<p>PMMA Abdeckung TB Flach Transparent 91% Transmission</p>	<p>PMMA Abdeckung TB Engstrahlend 91% Transmission</p>	<p>PMMA Abdeckung TB Flach Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Rund Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Eckig Opal 57% Transmission</p>
				
<p>PMMA cover TB flat transparent 91% transmission</p>	<p>PMMA cover TB narrow beam 91% transmission</p>	<p>PMMA cover TB flat milky 50% transmission</p>	<p>PMMA cover TB round milky 50% transmission</p>	<p>PMMA cover TB square milky 57% transmission</p>

TBK PROFIL BESTÜCKT MIT FLEXSTRIP 115 RGBW MIT EINEM LED ABSTAND VON 10,3MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN
TBK PROFILE FITTED WITH FLEXSTRIP 115 RGBW WITH A LED DISTANCE OF 10.3MM IN COMBINATION WITH THE DIFFERENT COVERS

<p>PMMA Abdeckung TB Flach Transparent 91% Transmission</p>	<p>PMMA Abdeckung TB Engstrahlend 91% Transmission</p>	<p>PMMA Abdeckung TB Flach Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Rund Opal 50% Transmission</p>	<p>PMMA Abdeckung TB Eckig Opal 57% Transmission</p>
				
<p>PMMA cover TB flat transparent 91% transmission</p>	<p>PMMA cover TB narrow beam 91% transmission</p>	<p>PMMA cover TB flat milky 50% transmission</p>	<p>PMMA cover TB round milky 50% transmission</p>	<p>PMMA cover TB square milky 57% transmission</p>