






LED Profil MFH | max. LED Leistung pro Meter: 55W → 3 x Flexstrip 75 (2 x direkt & 1 x indirekt)

ALUMINIUM PROFILE & ABDECKUNGEN ALUMINIUM PROFILES & COVERS	
 AP-005-002 Aluminium Profil MFH Aluminium profile MFH	 AB-005-100 Aluminium Abdeckung MF Aluminium cover MF

Ein fester Halt der Abdeckungen kann nur gewährleistet werden, wenn das Aluminiumprofil gemeinsam mit dem Aluminiumeinsatz oder dem Modul Einsatz verwendet wird.

A firm hold of the covers can only be ensured when the aluminium profile together with the aluminium inset or the module inset is used.

PROFIL ABDECKUNGEN UND EINSCHÜBE PROFILE COVERS AND INSETS			
$\eta \approx 72\%$  AB-005-001 PMMA Abdeckung MF Flach Transparent PMMA cover MF flat transparent	$\eta \approx 57\%$  AB-005-003 PMMA Abdeckung MF Flach Opal PMMA cover MF flat milky	$\eta \approx 85\%$  AB-006-001 PMMA Abdeckung CL Flach Transparent - indirekt PMMA cover CL flat transparent - indirect	
Transparente Abdeckung erforderlich Transparent cover necessary $\eta \approx 61\%$  MP-005-001 Mikroprism. Einschub MF Transparent Microprismatic Inset MF transparent	$\eta \approx 68\%$  AB-005-006 PMMA Abdeckung MF Rund Opal PMMA cover MF round milky	$\eta \approx 71\%$  AB-006-003 PMMA Abdeckung CL Flach Opal - indirekt PMMA cover CL flat milky - indirect	
Transparente Abdeckung erforderlich Transparent cover necessary $\eta \approx 58\%$  MP-005-003 Mikroprism. Einschub MF Opal Microprismatic Inset MF milky	$\eta \approx 66\%$  AB-005-009 PMMA Abdeckung MF Eckig Opal PMMA cover MF square milky	AB-005-200 ABS Profil Kabelkanalabdeckung ABS profile cable channel cover	

PROFIL ENDKAPPEN PROFILE ENDCAPS		
Endkappenstärke End cap thickness 2,5mm  EK-005-200 Profil Endkappe MFH Flach geschlossen Profile endcap MFH flat closed	Endkappenstärke End cap thickness 2,5mm  EK-005-210 Profil Endkappe MFH Rund geschlossen Profile endcap MFH round closed	Endkappenstärke End cap thickness 2,5mm  EK-005-220 Profil Endkappe MFH Eckig geschlossen Profile endcap MFH square closed

1m	2m	4m	SONDER LÄNGE	SPECIAL LENGTH
----	----	----	--------------	----------------


STANDARDLÄNGE = 2M | ALLE ANDEREN LÄNGEN SIND VOM UMTAUSCH UND DER RÜCKGABE AUSGESCHLOSSEN. LÄNGEN ÜBER 2M WERDEN MITTELS SPEDITION VERSENDET UND ERFORDERN EINE MINDESTBESTELLMENGE VON 10 STK.

STANDARD LENGTH = 2M | ALL OTHER LENGTHS ARE EXCLUDED FROM EXCHANGE AND RETURN. LENGTHS OVER 2M ARE SHIPPED BY FREIGHT CARRIER AND REQUIRE A MINIMUM ORDER QUANTITY OF 10 PCS.


HINWEIS PLEASE NOTE	
Kunststoff und Aluminium besitzen unterschiedliche Ausdehnungskoeffizienten, welche bei der Montage zu berücksichtigen sind. Ausgehend von 20°C verändert sich die Länge beim Aluminium um ca. 0,25mm pro Meter und beim Kunststoff um ca. 0,70mm pro Meter je 10°C Temperaturunterschied.	Plastic and aluminium have different expansion coefficients, which must be considered during assembly. Based on 20°C the length of aluminium changes approximately 0,25mm per meter and plastic approximately 0,70 mm per meter per 10°C of difference in temperature.

LED Profile MFH | max. LED power per meter: 55W → 3 x Flexstrip 75 (2 x directly & 1 x indirectly)

VARIANTE 1: ALUMINIUM EINSATZ MIT MFH PROFIL | VARIANT 1: ALUMINIUM INSET WITH MFH PROFILE

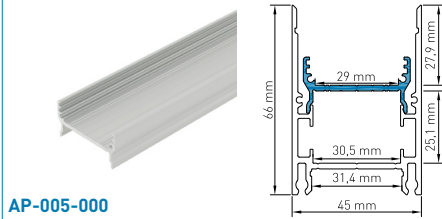

AP-005-000
Aluminium Einsatz MF
Aluminium inset MF

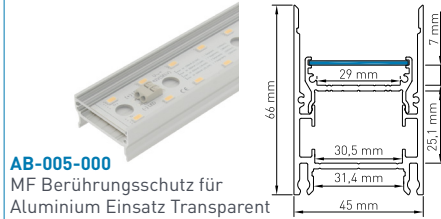


AB-005-000
MF Berührungsschutz für
Aluminium Einsatz Transparent
MF touch protection for
aluminium inset transparent




EK-005-000
Profil Endkappe MF Aluminium Einsatz
Profile endcap MF aluminium inset

VARIANTE 2: MODUL EINSATZ MIT MFH PROFIL MIT KABELFÜHRUNG | VARIANT 2: MODULE INSET WITH MFH PROFILE WITH CABLE GUIDE

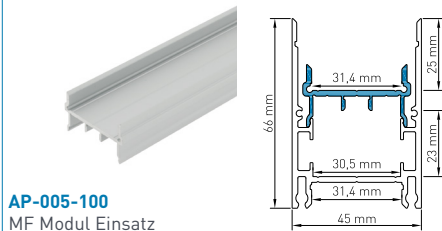

AP-005-100
MF Modul Einsatz
MF module inset

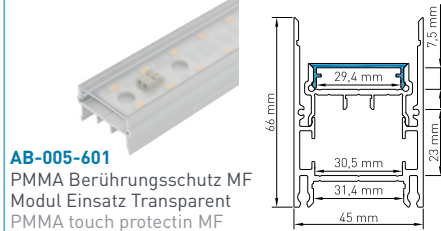


AB-005-601
PMMA Berührungsschutz MF
Modul Einsatz Transparent
PMMA touch protectin MF
module inset transparent



EK-005-001
Profil Endkappe MF Modul Einsatz
Profile endcap MF module inset

als Kabelkanalabdeckung
for cable canal cover

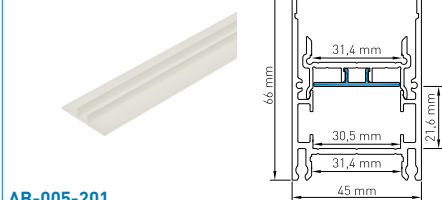

AB-005-201
ABS Modul Einsatz Kabelkanalabdeckung
ABS module inset cable channel cover

PROFIL ZUBEHÖR | PROFILE ACCESSORIES



PZ-001-002
Seilabhänger 2m
inkl. Deckenbefestigung
Wire suspension 2m
incl. ceiling fixture

PZ-001-005
Seilabhänger 5m
inkl. Deckenbefestigung
Wire suspension 5m
incl. ceiling fixture



PZ-002-003
Seilstopper mit Y-Aufhängung 120mm Seil 4mm Kugeln
Wire stopper with Y-suspension 120mm wire 4mm rolls



EK-100-002
Torx Bit TX8 für Endkappenschrauben
Torx Bit TX8 for endcap screws



PZ-006-001
Saugnapf 30mm
Suction cup 30mm

Für 1 Profilverbindung sind 2 Stück Verbinder notwendig
For 1 profile connection 2 pieces connectors necessary



PZ-004-005
Profilverbinder MF und SL
Profile connector MF and SL

Anwendungsbeispiel MFR Profil mit
Innen-, - und Aussenecken Profilverbinder
Application example MFR profile with
Inside, - and outside corner profile connectors



PZ-004-007
Eck Profilverbinder Innen- und
Kreuzecken MF und SL
Corner Profile connector inside- and
cross corners MF and SL











PZ-004-008
Eck Profilverbinder Aussenecken
MF und SL
Corner Profile connector outside corner
MF and SL



Aussenecke
outside corner

LED Profil MFH mit Einsatz | LED Profile MFH with Inset

MFH PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 36 RGB MIT EINEM LED ABSTAND VON 33MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN				
MFH PROFILE FITTED WITH 2 X FLEXSTRIP 36 RGB WITH A LED DISTANCE OF 33MM IN COMBINATION WITH THE DIFFERENT COVERS				
PMMA Abdeckung MF Flach Transparent 91% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung MF Flach Opal 76% Transmission	PMMA Abdeckung MF Eckig Opal 76% Transmission
				
PMMA cover MF flat transparent 91% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover MF flat milky 76% transmission	PMMA cover MF square milky 76% transmission
MFH PROFIL BESTÜCKT MIT 1 X FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN				
MFH PROFILE FITTED WITH 1 X FLEXSTRIP 72 WITH A LED DISTANCE OF 16.5MM IN COMBINATION WITH THE DIFFERENT COVERS				
PMMA Abdeckung MF Flach Transparent 91% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung MF Flach Opal 76% Transmission	PMMA Abdeckung MF Eckig Opal 76% Transmission
				
PMMA cover MF flat transparent 91% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover MF flat milky 76% transmission	PMMA cover MF square milky 76% transmission
MFH PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN				
MFH PROFILE FITTED WITH 2 X FLEXSTRIP 72 WITH A LED DISTANCE OF 16.5MM IN COMBINATION WITH THE DIFFERENT COVERS				
PMMA Abdeckung MF Flach Transparent 91% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung MF Flach Opal 76% Transmission	PMMA Abdeckung MF Eckig Opal 76% Transmission
				
PMMA cover MF flat transparent 91% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover MF flat milky 76% transmission	PMMA cover MF square milky 76% transmission
MFH PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 48 ODER 72 DW MIT EINEM LED ABSTAND VON 7,15MM IN KOMBINATION MIT DEN UNTERSCH. ABDECKUNGEN				
MFH PROFILE FITTED WITH 2 X FLEXSTRIP 48 OR 72 DW WITH A LED DISTANCE OF 7.15MM IN COMBINATION WITH THE DIFFERENT COVERS				
PMMA Abdeckung MF Flach Transparent 91% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung MF Flach Opal 76% Transmission	PMMA Abdeckung MF Eckig Opal 76% Transmission
				
PMMA cover MF flat transparent 91% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover MF flat milky 76% transmission	PMMA cover MF square milky 76% transmission

